

Quality Door and Window Fittings


NT 'R' HINGE CONCEALED TILT BEFORE TURN

A3 0907 Product by ROTO

The ROTO NT "R" Hinge Tilt and Turn System is designed for use on PVCU, Timber and Aluminium systems with a eurogroove and 12mm fittings clearance.

- All parts are preset for easy fitting
- All hinges are concealed and fully adjustable
- 16mm width profiled faceplate gives extra support to cam collars
- Modular design means fewer parts
- Patented Clip & Fit system for ease of connection
- Three different locking cams for compression and security
- 36mm cam travel guarantees optimal striker entry depth in the striker
- High level of security as standard
- Easy upgrade to BS7950 Security Specification
- All surfaces coated with ROTOSIL which exceeds the requirement of BS7479, DIN 50 021, RAL607/3, BS6375 Part 2
- Application Range
 - SRW min 360mm – max 1400mm
 - SRH min 310mm – max 2400mm
 - Max sash weight 100kg






Quality Door and Window Fittings

NT 'R' HINGE CONCEALED TILT BEFORE TURN

A3 0907 Product by ROTO

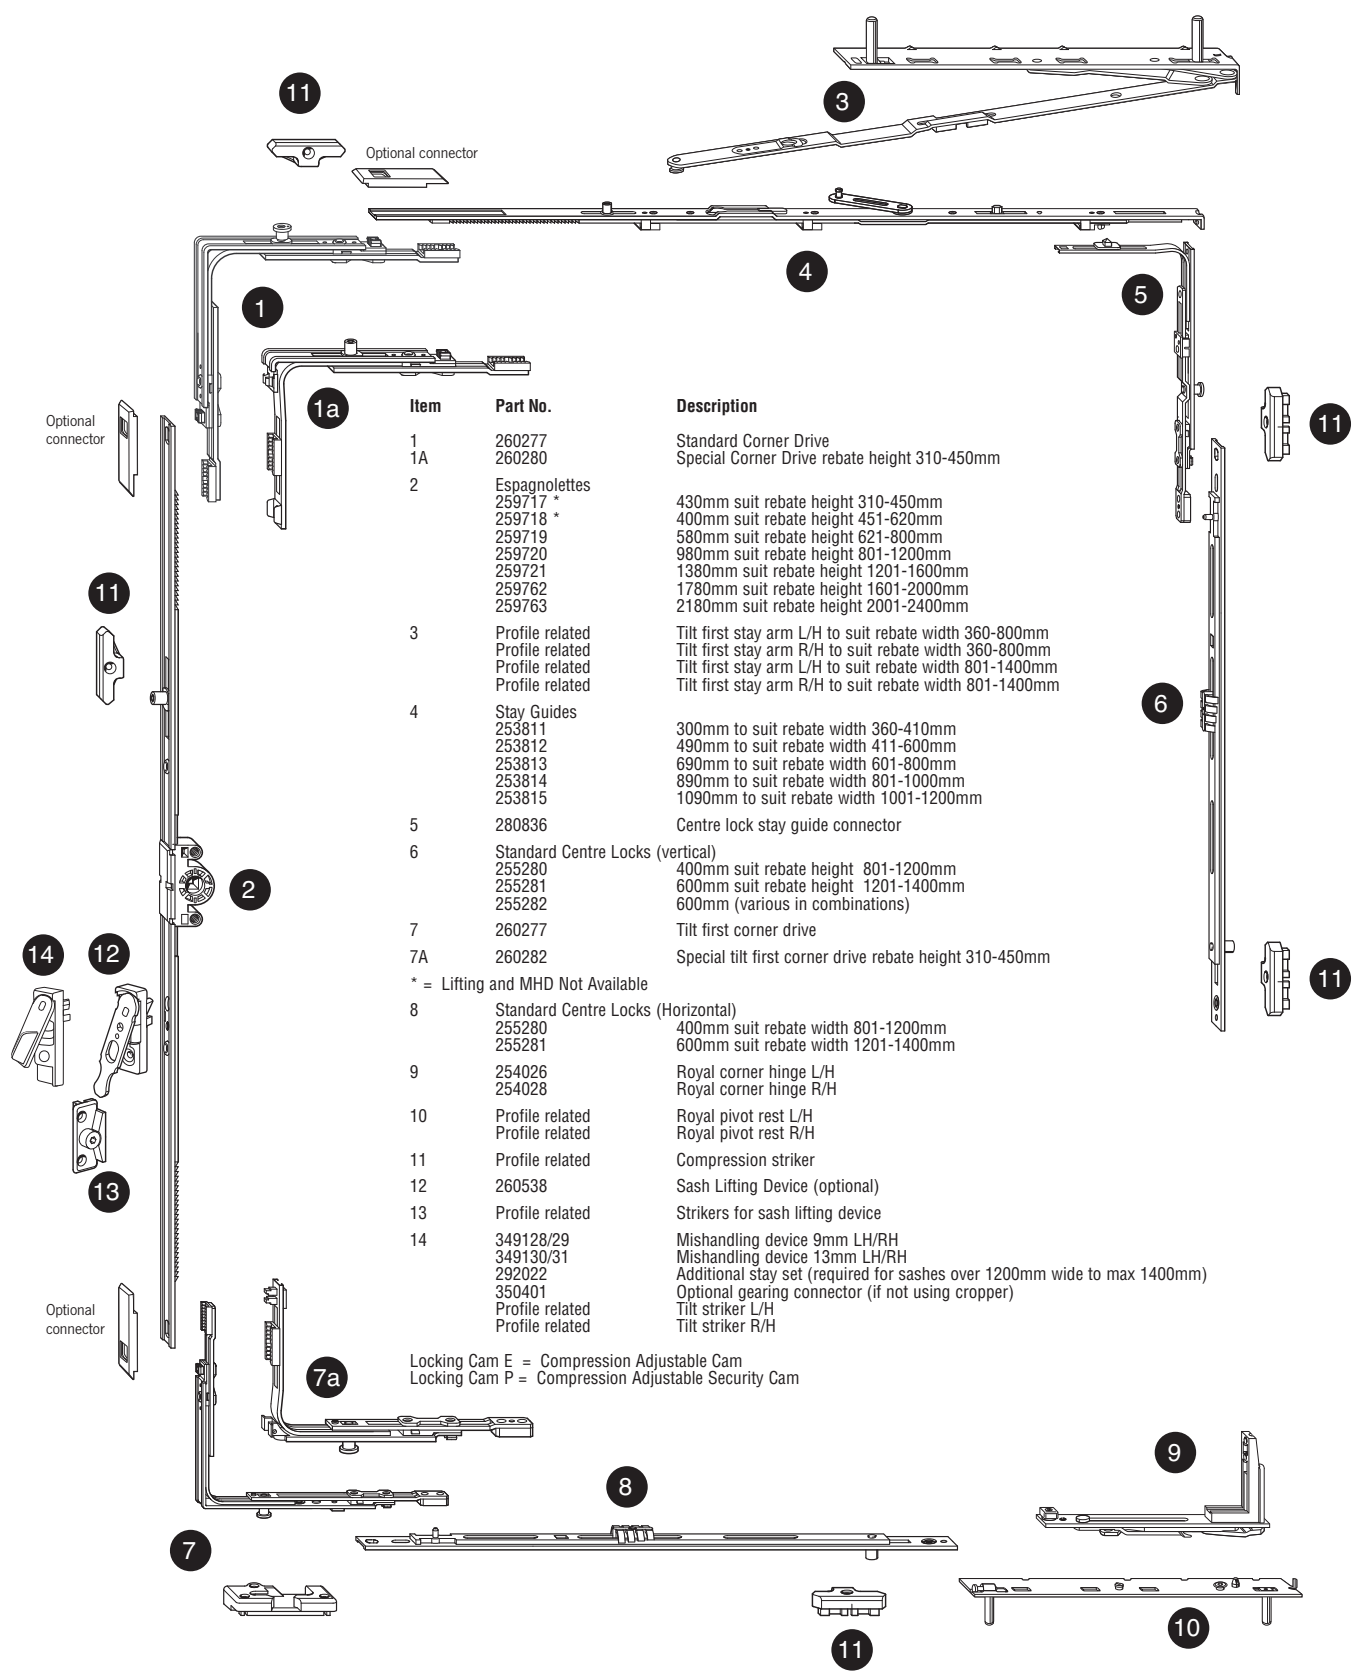

Item	Part No.	Description
1	260277	Standard Corner Drive
1A	260280	Special Corner Drive rebate height 310-450mm
2	Espagnolettes	
	259717 *	430mm suit rebate height 310-450mm
	259718 *	400mm suit rebate height 451-620mm
	259719	580mm suit rebate height 621-800mm
	259720	980mm suit rebate height 801-1200mm
	259721	1380mm suit rebate height 1201-1600mm
	259762	1780mm suit rebate height 1601-2000mm
	259763	2180mm suit rebate height 2001-2400mm
3	Profile related	Tilt first stay arm L/H to suit rebate width 360-800mm
	Profile related	Tilt first stay arm R/H to suit rebate width 360-800mm
	Profile related	Tilt first stay arm L/H to suit rebate width 801-1400mm
	Profile related	Tilt first stay arm R/H to suit rebate width 801-1400mm
4	Stay Guides	
	253811	300mm to suit rebate width 360-410mm
	253812	490mm to suit rebate width 411-600mm
	253813	690mm to suit rebate width 601-800mm
	253814	890mm to suit rebate width 801-1000mm
	253815	1090mm to suit rebate width 1001-1200mm
5	280836	Centre lock stay guide connector
6	Standard Centre Locks (vertical)	
	255280	400mm suit rebate height 801-1200mm
	255281	600mm suit rebate height 1201-1400mm
	255282	600mm (various in combinations)
7	260277	Tilt first corner drive
7A	260282	Special tilt first corner drive rebate height 310-450mm
* = Lifting and MHD Not Available		
8	Standard Centre Locks (Horizontal)	
	255280	400mm suit rebate width 801-1200mm
	255281	600mm suit rebate width 1201-1400mm
9	254026	Royal corner hinge L/H
	254028	Royal corner hinge R/H
10	Profile related	Royal pivot rest L/H
	Profile related	Royal pivot rest R/H
11	Profile related	Compression striker
12	260538	Sash Lifting Device (optional)
13	Profile related	Strikers for sash lifting device
14	349128/29	Mishandling device 9mm LH/RH
	349130/31	Mishandling device 13mm LH/RH
	292022	Additional stay set (required for sashes over 1200mm wide to max 1400mm)
	350401	Optional gearing connector (if not using cropper)
	Profile related	Tilt striker L/H
	Profile related	Tilt striker R/H

Locking Cam E = Compression Adjustable Cam
Locking Cam P = Compression Adjustable Security Cam