

### FRAMEVENT

Manufactured in UV stabilized high quality PVCu the Framevent is suitable for PVCu, Timber and Aluminium windows. Its robust yet slim and elegantly rounded design with integral flyscreen, snap on quick fit end caps, and a positive open and close action can be fitted to give updraft or down-draft. Can be retro fitted.

- Achieves a water tightness limit of 400 p.a
- Independently tested to BS EN 13141-1:2004
- Packed as a set with screws provided
- Sleeves available on certain models to comply with BS 7412:2000
- 10 year colourfast guarantee

Available in Standard White, Bright White, Cream, Tan, Dark Brown, Tan outer/Bright White inner and Dark Brown outer/Bright White inner.

Part No.	Description	Box Qty.
0530029	Framevent 2500-12.5 Standard White	100
0530030	Framevent 2500-12.5 Bright White	100
0530031	Framevent 2500-12.5 Tan (Light Oak)	100
0530032	Framevent 2500-12.5 Dark Brown (Mahogany)	100
0530053	Framevent 2500-12.5 Cream	100
0531101	Framevent 2500-12.5 Tan outer/Bright White inner	100
0531102	Framevent 2500-12.5 Dark Brown outer/Bright White inner	100
0530025	Framevent 2500-15 Standard White	100
0530026	Framevent 2500-15 Bright White	100
0530027	Framevent 2500-15 Tan (Light Oak)	100
0530028	Framevent 2500-15 Dark Brown (Mahogany)	100
0530052	Framevent 2500-15 Cream	100

Framevent 5000 available to order - box quantity 50.

### SLIMLINE VENT

Manufactured in aluminium with nylon end caps, the Slimline vent is a robust, yet stylish ventilator suitable for PVCu, Timber and Aluminium windows. Can be retro fitted.

- Achieves water tightness limit of 400 p.a
- Independently tested to BS EN 13141-1:2004
- Easy operation and installation
- Controllable and draught free
- Semi-permanent trickle option available

Available from Groupco in White or Brown finish.

Black and Silver are available to special order.

Part No.	Description	Box Qty.
0120515	Slimline 4000-12.5 White	100
0120521	Slimline 4000-12.5 Brown	100






Quality Door and Window Fittings

# Casement Ventilation FRAMEVENT & SLIMLINE VENT

C18 0908

## FRAMEVENT 2500-12.5

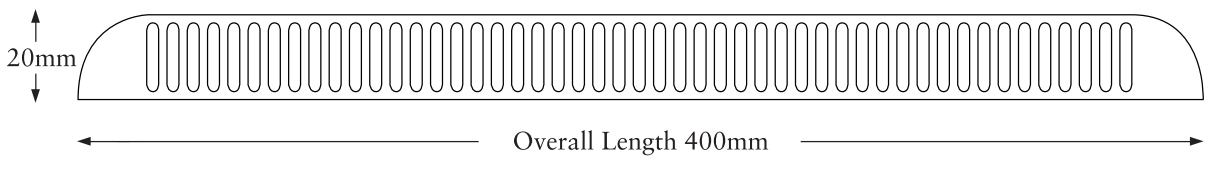

### Routing details

- 2500-12.5 vent Overall unit length 400mm. Screw hole centres 380mm.  
Equivalent area as per BS 13141-1:2004, 2500mm<sup>2</sup>  
Slot size: Single 330 x 12.5mm
- 2500-15 vent Overall unit length 300mm. Screw hole centres 280mm.  
Equivalent area as per BS 13141-1:2004, 2500mm<sup>2</sup>  
Slot size: 245 x 15mm

## SLIMLINE VENT

### Slot sizes

- Slimline 2500-12.5 Unit length 375mm.  
Equivalent area as per BS 13141-1:2004, 2500mm<sup>2</sup>  
Slot size: 340 x 12.5mm

